


### Overview

### HPE ProLiant ML110 Generation9 (Gen9)


The HPE ProLiant ML110 Gen9 Server is a 1P/ 4.5U affordable single-socket tower server featuring better performance, expansion, and growth than previous 1P single-socket tower models. Designed to meet small and midsized businesses' performance compute demands the ML110 Gen9 delivers exceptional value at an affordable price.

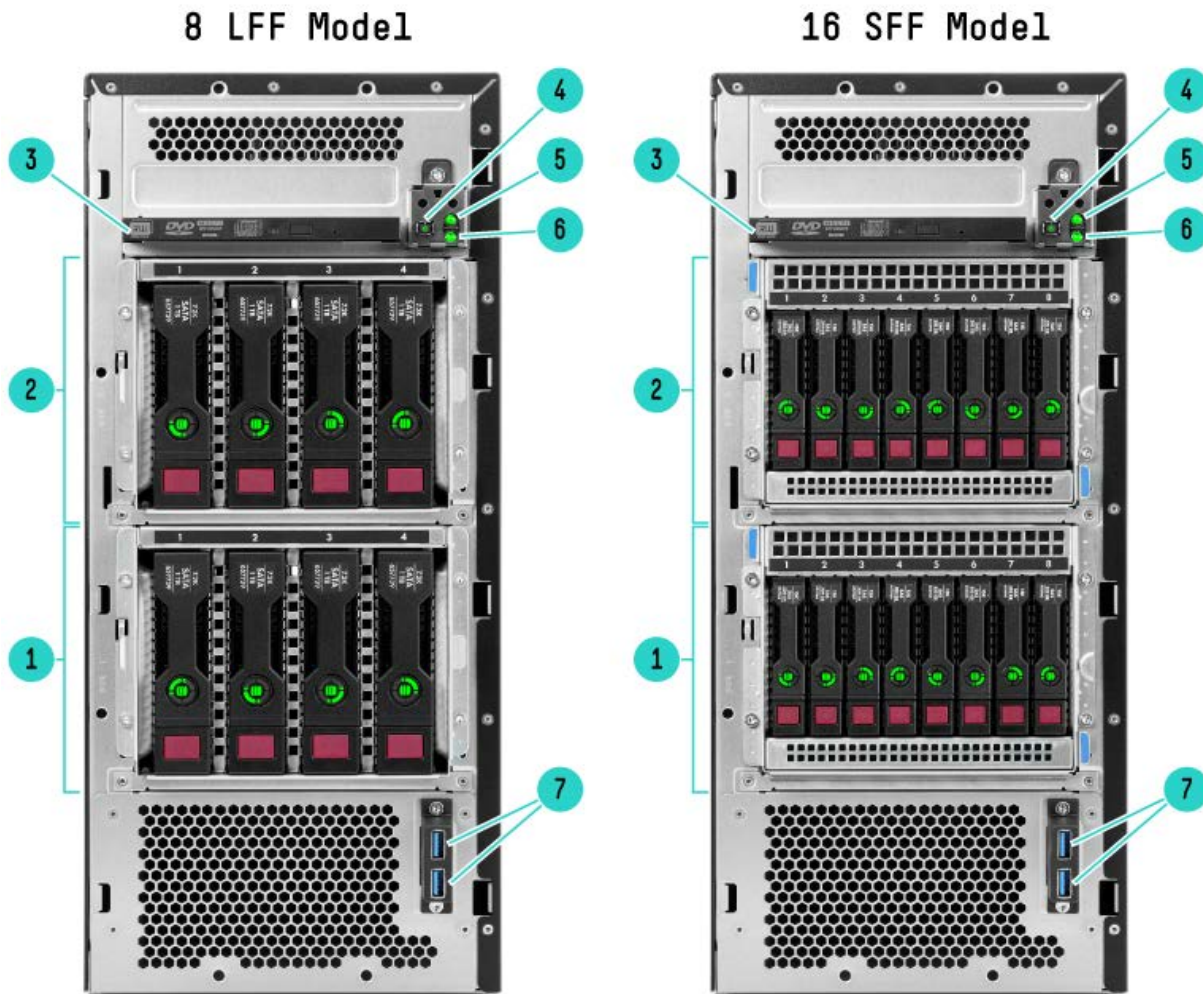

### Front View (details for 8LFF and 16SFF)

- |   |                          |   |                  |
|---|--------------------------|---|------------------|
| 1 | Drive cage               | 2 | Drive cage       |
| 3 | Optical drive (optional) | 4 | Power button/LED |
| 5 | Health LED               | 6 | NIC status LED   |
| 7 | USB 3.0 (2) connectors   |   |                  |


## Overview

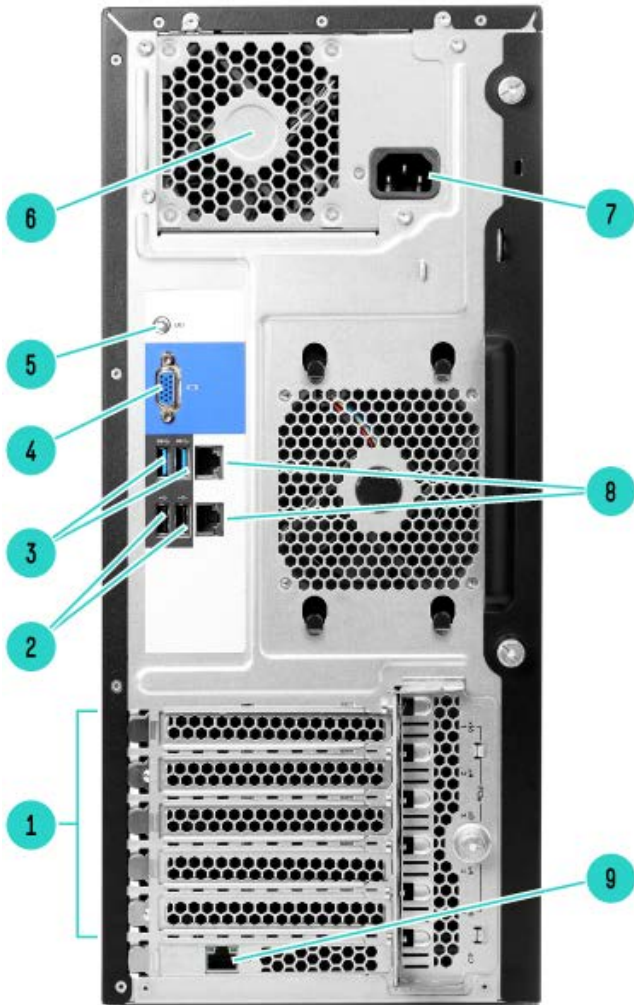

## Rear View

- |   |   |   |                         |
|---|---|---|-------------------------|
| 1 | PCIe3 Slots (Slots 1-5)                       | 2 | USB 2.0 (2) connectors  |
| 3 | USB 3.0 (2) connectors                        | 4 | Video connector         |
| 5 | UID button/LED                                | 6 | Power supply bay        |
| 7 | Power supply power connection                 | 8 | Network RJ-45 ports (2) |
| 9 | HPE ML Gen9 dedicated iLO port kit (optional) |   |                         |

## Overview

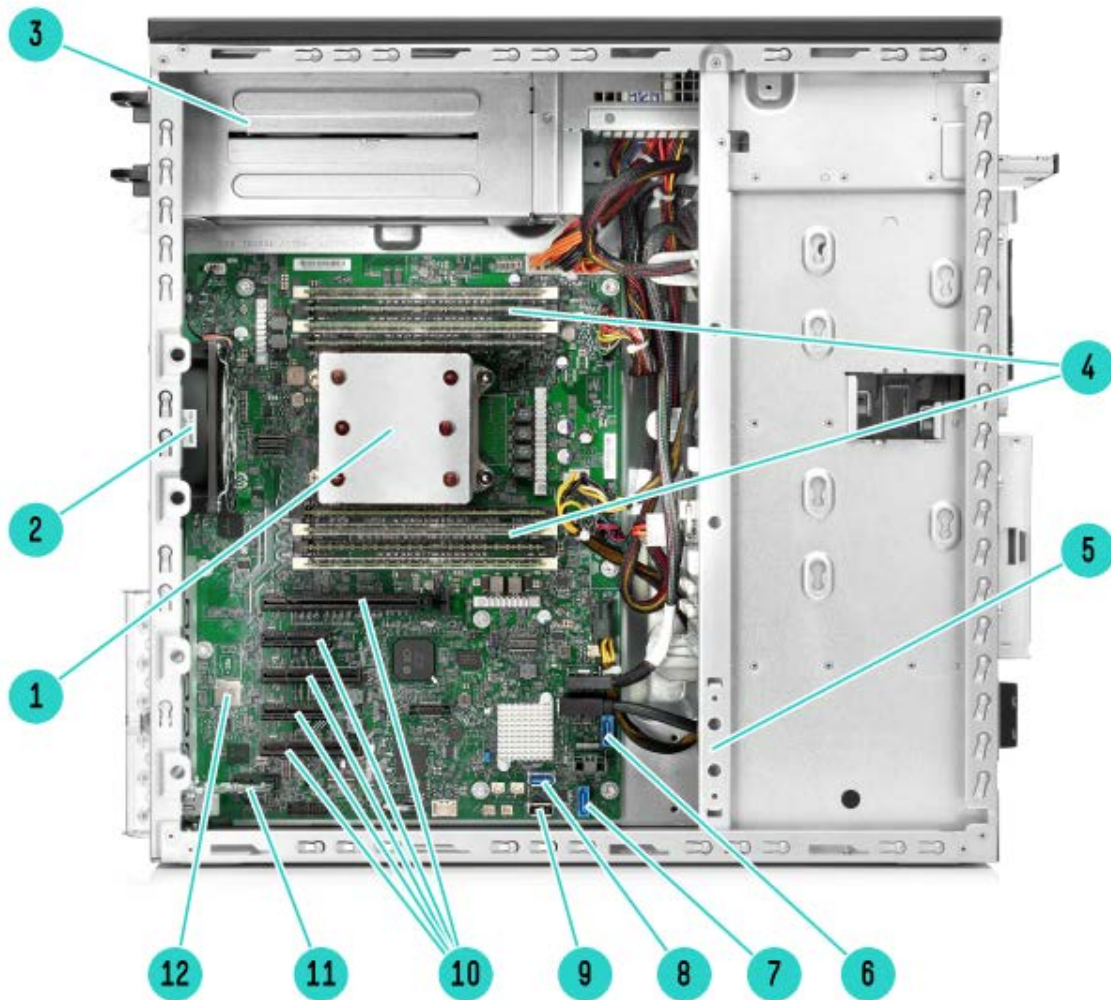

### Internal View

- |    |  |    |  |
|----|--|----|--|
| 1  | One (1) processor and heatsink with HPE Smart Socket Guide | 2  | System Fan (92x32mm default), upgrade system fan(92x38mm) is required for 140W E5-1600v3 Processor and SAS SSD |
| 3  | Power Supply backplane cage                                | 4  | Eight (8) DDR4 DIMM slots  |
| 5  | PCIe fan (option required to support PCIe expansion cards) | 6  | Front USB 3.0 connector  |
| 7  | SATA connector 1   | 8  | Internal USB 3.0 connector   |
| 9  | Internal USB 2.0 connector                                 | 10 | Five (5) PCIe3 expansion slots   |
| 11 | Dedicated iLO module slot (optional)                       | 12 | MicroSD slot   |

## Standard Features

**NOTE:** For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

Processor	Model	CPU frequency	Cores	L3 Cache	Power	QPI	DDR4 Hz
One of the following depending on model	E5-1650v3	3.5GHz	6	15MB	140W	0.0GT/s	2133
	E5-1603v3	2.8GHz	4	10MB	140W	0.0GT/s	1866
	E5-1620v3	3.5GHz	4	10MB	140W	0.0GT/s	2133
	E5-2660v4	2.0GHz	14	35MB	105W	9.6GT/s	2400
	E5-2640v4	2.4GHz	10	25MB	90W	8.0GT/s	2133
	E5-2630Lv4	1.8GHz	10	25MB	55W	8.0GT/s	2133
	E5-2623v4	2.6GHz	4	10MB	85W	8.0GT/s	2133
	E5-2620v4	2.1GHz	8	20MB	85W	8.0GT/s	2133
	E5-2609v4	1.7GHz	8	20MB	85W	6.4GT/s	1866
	E5-2603v4	1.7GHz	6	15MB	85W	6.4GT/s	1866
	E5-1680v4	3.4GHz	8	20MB	140W	9.6GT/s	2400
	E5-1660v4	3.2GHz	8	20MB	140W	9.6GT/s	2400
	E5-1620v4	3.5GHz	4	10MB	140W	0.0GT/s	2400
	E5-1607v4	3.1GHz	4	10MB	140W	0.0GT/s	2400
	E5-1603v4	2.8GHz	4	10MB	140W	0.0GT/s	2400

**NOTE:** Up to 1 processor supported. Mixing different processor models is not supported.

### Cache Memory

One of the following depending on model

10MB (1 x 10MB) Level 3 cache

**NOTE:** For Four-core processors.

15MB (1 x 15MB) Level 3 cache

**NOTE:** For Six-core processors.

20MB (1 x 20MB) Level 3 cache

**NOTE:** For Eight-core processors.

25MB (1 x 25MB) Level 3 cache

**NOTE:** For Ten-core processors.

30MB (1 x 30MB) Level 3 cache

**NOTE:** For Ten-core processors.

35MB (1 x 35MB) Level 3 cache

**NOTE:** For Fourteen-core processors.

### Chipset

Intel® C610 Series Chipset

Intel® E5-2600v4 Processor Family

Intel® E5-2600v3 Processor Family

Intel® E5-1600v4 Processor

Intel® E5-1600v3 Processor Family

**NOTE:** This is a 140W processor which need to be ordered with the ML110 Gen9 System fan upgrade kit - 789654-B21.

**NOTE:** For more information regarding Intel® chipsets, please see the following

URL: <http://www.intel.com/products/server/chipsets/>

### On System Management Chipset

HPE iLO (Firmware HPE iLO4 2.0 or later) 2GB NAND

**NOTE:** Read and learn more in the [HPE iLO QuickSpecs](#).

### Memory

Type:

HPE SmartMemory and Standard Memory

## Standard Features

DDR4 Registered (RDIMM) or Load Reduced (LRDIMM)		
DIMM Slots Available	8	(8 DIMM slots per processor, 4 channels per processor, 2 DIMMs per channel)
Maximum Capacity (LRDIMM)	128GB	(8 x 16GB LRDIMM @2133MHz)
Maximum Capacity (RDIMM)	256GB	(8 x 32GB RDIMM @2133MHz)

**NOTE:** This server does not support mixing LRDIMMs and RDIMMs. Attempting to mix any combination of these DIMMs can cause the server to halt during BIOS installation.

<b>Memory Protection</b>	Advanced ECC	Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.
	Online spare	Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.

<b>Network Controller</b>	Broadcom 5717C0 Dual-port 1Gb
---------------------------	-------------------------------

### Expansion Slots

Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Form Factor	Notes
5	PCIe 3.0	x8	x8		Full-height, half-length slot	For processor 1
4	PCIe 3.0	x4	x4		Full-height, half-length slot	For processor 1
3	PCIe 3.0	x8	x8		Full-height, half-length slot	For processor 1
2	PCIe 3.0	x4	x4		Full-height, half-length slot	For processor 1
1	PCIe 3.0	x16	x16		Full-height, ¾ length (up to 9.5") Slot	For processor 1

**NOTE:** Bus number - Default bus assignment (in decimal). Inserting cards with PCI bridges may alter the actual bus assignment number.

**NOTE:** Five total expansion PCIe 3.0 slots. One PCIe 3.0 x16 (x16 speed); Two PCIe 3.0 x 8 (x8 speed); Two PCIe 3.0 x 4 (x4 speed).

Expansion Slots #	Technology	Bus Width	Connector Width	Bus Number	Device Number	Form Factor	Notes
6	HPE ML Gen9 Dedicated iLO Port Kit		x1			Dedicate for ML Series	

<b>Storage Controller</b> One of the following depending on model	Entry Models	HPE Dynamic Smart Array B140i Controller
	Base Models	HPE Dynamic Smart Array B140i Controller

**NOTE:** B140i can't mix with any standup internal controller.

**NOTE:** B140i can't mix with any standup internal controller.

<b>Internal Storage Devices</b>	Optical Drive	Optional SATA 9.5mm DVD-ROM Optical Drive Optional SATA 9.5mm DVD RW Optical Drive
---------------------------------	---------------	---



## Standard Features

One of the following depending on model

Hard Drives

**NOTE:** Optical is optional in BTO models.

None ship standard

Hard Drive Bays

Up to 4 Non-hot plug SATA 3.5" drives

**NOTE:** Mixing drive cage types is not allowed.

**NOTE:** All Pre-configured Models come populated with hard drive blanks installed. The 4LFF configurations includes 3 blanks and 8SFF includes 7 blanks. Additional hard drive blanks can be ordered using either P/N 666986-B21 for the HPE LFF HDD Blank Kit or P/N 666987-B21 for the HPE SFF HDD Blank Kit. These part numbers for single HDD blanks below are also provided should you require replacement HDD blanks for your server.

**NOTE:** NHPE SATA is limited to B140i controller.

4 Hot plug LFF SAS/SATA HDD bays; upgradable to 8

8 Hot plug SFF SAS/SATA HDD bays; upgradable to 16

**NOTE:** 16SFF is limited to P840 controller.

**NOTE:** H240 8LFF/8SFF require 2 cable kit P/N: 784606-B21.

**NOTE:** P84016SFF require 2 cable kit P/N: 784608-B21.

### Maximum Internal Storage

One of the following depending on model

Hot Plug LFF SAS

### CAPACITY

80TB

### CONFIGURATION

8x10TB

Hot Plug LFF SATA

80TB

8x10TB

Hot Plug SFF SAS

32TB

16x2TB

Hot Plug SFF SATA

32TB

16x2TB

Non Hot Plug LFF SATA

16TB

4x4TB

Hot Plug LFF SATA SSD

15.36TB

8x1.92TB

Hot Plug SFF SAS SSD

6.4TB

16x400GB

Hot Plug SFF SATA SSD

30.72TB

16x1.92TB

### Power Supply

One of the following depending on model

HPE 350W ATX-Gen9 Power Supply FIO Kit

HPE 550W ATX-Gen9 Power Supply Kit

HPE 750W CS Gold Ht Plg Pwr Supply Kit

**NOTE:** The first 750W CS Gold Ht Plg Pwr Supply Kit requires the RPS Enablement Kit.

**NOTE:** The RPS Enablement kit will support two power supplies.

HPE Entry-Level Power Supplies provide lower-cost options for customers trying to balance their need for enterprise class efficiency and reliability while maintaining lowest possible hardware costs. All Entry-Level power supply options have been designed specifically for HPE ProLiant Gen9 Essential Series servers.

The HPE 550W FIO Power Supply is the standard, non-redundant AC power supply option for most HPE ProLiant Gen9 Essential servers. It features Silver-level (89%) certified power efficiency with a set of features optimized for the Gen9 Essential-series rack and tower servers.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the HPE Power Advisor Tool located at <http://www.hp.com/go/hppoweradvisor>.

Power specifications and technical content for all HPE Server power supplies can be found at <http://www.hp.com/go/proliant/powersupply>.

## Standard Features

System Fans	Non-redundant	Redundant
One of the following depending on model	1P model <b>NOTE: One (1) Non-hot plug, non-redundant fan ships as standard.</b>	2 fans NA
Interfaces	Video Network RJ-45 (Ethernet) HPE iLO Remote Management Network Port Micro SD Slot <b>NOTE: The Micro-SD slot is not a hot-pluggable device. Customers should not attempt to plug a Micro-SD card into the Micro-SD slot while the server is powered.</b> USB 3.0 USB 2.0	1 (rear) 2 1GbE Optional Port 1 (internal) 5 (2 rear, 1 internal, 2 front ) 3 (2 rear, 1 internal)
Operating Systems and Virtualization Software Support for ProLiant Servers	<b>Microsoft Windows Server</b> <b>Red Hat Enterprise Linux (RHEL)</b> <b>SUSE Linux Enterprise Server (SLES)</b> <b>VMware</b> <b>NOTE: For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <a href="http://www.hp.com/go/ossupport">http://www.hp.com/go/ossupport</a> and our driver download page <a href="http://h20566.www2.hp.com/hpsc/swd/public/readIndex?sp4ts.oid=7796456">http://h20566.www2.hp.com/hpsc/swd/public/readIndex?sp4ts.oid=7796456</a>.</b>	
Upgradeability	Up to 16 SFF Hard Drive Bays; Or 8 LFF Hard Drive Bays Up to 8 DIMM slots Redundant Power Supply Optional optical drive (up to 1)	
Industry Standard Compliance	ACPI 2.0b Compliant PCIe 3.0 Compliant PXE Support WOL Support Novell Certified IPMI 2.0, SMASH CLP, DCMI 1.0 compliant Microsoft® Logo certifications USB 3.0 Support SMBIOS 2.7.1 ASHRAE A3	
Graphics	16 bit color: maximum resolution of 1920 x 1200 Integrated Matrox G200 video standard 32 bit color: maximum resolution of 1280 x 1024 <ul style="list-style-type: none"> <li>16 MB Flash</li> <li>128 MB DDR3</li> </ul>	
HPE Server UEFI/Legacy ROM	Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time.	

## Standard Features

HPE ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode.

**NOTE:** The UEFI System Utilities function is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using RESTful API for iLO 4
- PXE boot support for IPv6 networks
- Boot support for option cards that only support a UEFI option ROM
- Network Stack configurations

**NOTE:** For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

**NOTE:** UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen9 Server.

---

### Form Factor

Tower (4.5U)

**NOTE:** Sliding Shelf - 234672-B21 is optional to support rack form factor.

---

### Embedded Management

**HPE Integrated Lights-Out (HPE iLO)** Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Not available on ML10 Gen9. Learn more at <http://www.hpe.com/info/ilo>.

**UEFI** Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <http://www.hpe.com/servers/uefi>.

**RESTful API** RESTful API for iLO 4 is Redfish 1.0 conformance for simplified server management such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

**Intelligent Provisioning** Hassle free server and OS provisioning for 1 or few servers with Intelligent Provisioning. Learn more at <http://www.hpe.com/servers/intelligentprovisioning>.

**Embedded Remote Support** The Hewlett Packard Enterprise embedded remote support, when used with Insight Online direct connect or HPE Insight Remote Support, allows HPE ProLiant servers to transmit hardware events directly to Hewlett Packard Enterprise or a Hewlett Packard Enterprise Authorized Partner for automated phone home support. Learn more at <http://www.hpe.com/info/insightonline/explore>.

---



## Standard Features

<b>Server utilities</b>	<b>Smart Update</b>	Optimize firmware and driver updates with Smart Update solutions including Smart Update Manager (SUM) and Service Pack for ProLiant (SPP) and smart components. Learn more at <a href="http://www.hpe.com/servers/smartupdatemanager">http://www.hpe.com/servers/smartupdatemanager</a> .
	<b>HPE Systems Insight Manager (HPE SIM)</b>	HPE SIM allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers, and also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <a href="http://www.hpe.com/servers/hpsim">http://www.hpe.com/servers/hpsim</a> .
	<b>Scripting Tool Kit and Windows PowerShell</b>	Provision 1 to many servers using your own scripts to discover and deploy them with Scripting Tool Kit (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <a href="http://www.hpe.com/servers/proliant/stk">http://www.hpe.com/servers/proliant/stk</a> or <a href="http://www.hpe.com/servers/powershell">http://www.hpe.com/servers/powershell</a> .
	<b>RESTful Interface Tool</b>	RESTful Interface tool is a scripting tool to provision using RESTful API for iLO 4 to discover and deploy servers at scale. Learn more at <a href="http://www.hpe.com/info/resttool">http://www.hpe.com/info/resttool</a> .
	<b>HPE iLO Mobile Application</b>	Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <a href="http://www.hpe.com/info/ilo/mobileapp">http://www.hpe.com/info/ilo/mobileapp</a> .
	<b>HPE Insight Online</b>	HPE Insight Online, available at no additional cost as part of your Hewlett Packard Enterprise warranty, Care Pack or contractual support agreement with Hewlett Packard Enterprise, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at <a href="http://www.hpe.com/info/insightonline/explore">http://www.hpe.com/info/insightonline/explore</a> .

**NOTE:** The Service Pack for ProLiant (which includes HPE SUM) can be downloaded from <http://www.hp.com/go/spp/download>. More information can be found: <http://www.hp.com/go/SmartUpdate>, <http://www.hp.com/go/spp> and <http://www.hp.com/go/hpsum>.

---

<b>Security</b>	<ul style="list-style-type: none"> <li>Power-on password</li> <li>Setup password</li> <li>Serial interface control</li> <li>Power switch security</li> <li>Administrator's password</li> <li>TPM 1.2</li> <li>TPM 2.0</li> <li>UEFI</li> </ul>
-----------------	--

---

<b>Warranty</b>	<p>This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of HPE Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.</p> <p><b>NOTE:</b> Server Warranty includes 3-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for</p>
-----------------	--

## Standard Features

easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h17007.www1.hp.com/us/en/enterprise/servers/warranty/>.

## Optional Features

<b>Embedded Management</b>	<b>iLO Essentials</b>	HPE iLO Essentials is the preferred license for small and medium business that offers full remote server management capabilities for small and medium business via the Integrated Remote Console (IRC), virtual media, and e-mail based alerts. Learn more about HPE iLO Essentials at <a href="http://www.hp.com/go/iLO/essentials">http://www.hp.com/go/iLO/essentials</a> .
	<b>iLO Advanced</b>	HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at <a href="http://www.hp.com/go/iloadvanced">http://www.hp.com/go/iloadvanced</a> .
<b>Server Management</b>	<b>HPE Insight Control</b>	HPE Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see <a href="http://www.hpe.com/info/insightcontrol">http://www.hpe.com/info/insightcontrol</a> .
<b>High Performance Clusters</b>	HPE Insight Cluster Management Utility (CMU) is a Hewlett Packard Enterprise licensed and supported suite of tools that are used for lifecycle management of hyperscale clusters of Linux ProLiant systems. CMU includes software for the centralized provisioning, management and monitoring of nodes. CMU makes the administration of clusters user friendly, efficient, and effective. <a href="http://www.hp.com/go/cmu">http://www.hp.com/go/cmu</a> . HPE Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPEC Server. A Cluster Platform Configurator simplifies ordering. <a href="http://www.hp.com/go/clusters">http://www.hp.com/go/clusters</a> .	
<b>HPC Interconnects</b>	<b>NOTE:</b> High Performance Computing (HPC) interconnect technologies are available for this server under the HPE Cluster Platform product portfolio. These high-speed interconnects are fully supported by Hewlett Packard Enterprise when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPEC Clusters with InfiniBand Interconnects: <a href="http://www.hp.com/techservers/clusters/ucp/index.html">http://www.hp.com/techservers/clusters/ucp/index.html</a> .	
<b>Storage Software</b>	Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than Hewlett Packard Enterprise storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities. Storage software that gets the job done:	
	<ul style="list-style-type: none"> <li>• <b>Data Protection and Recovery Software</b> Whether you're a large enterprise or a smaller business, Hewlett Packard Enterprise data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.</li> <li>• <b>Data Archive and Migration Software</b> Hewlett Packard Enterprise storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.</li> <li>• <b>Storage Resource Management Software (SRM)</b> Hewlett Packard Enterprise storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.</li> </ul>	

## Optional Features

- **Data Replication Software**  
Hewlett Packard Enterprise offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting.
- **Storage Device Management Software**  
Maximize your investment in Hewlett Packard Enterprise storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management.
- **HPE StoreVirtual VSA**  
With HPE StoreVirtual VSA you can use the power of virtualization to create a virtual array within your host server. Manage it as a single pool of shared storage capacity, and scale it to match your evolving needs. HPE ProLiant Gen9 servers include a 3-year limited license for HPE StoreVirtual VSA software with 1TB of capacity at no extra cost. Simply select to install HPE StoreVirtual VSA software during server setup within Intelligent Provisioning. More information, instructional videos, and free console management software are available at <http://www.hp.com/go/vsa1TB>.

**NOTE:** For more information about Storage Software including QuickSpecs, please see: <http://www.hp.com/go/storage/software>.

---

### One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hp.com/SimplifiedConfig/Index>.

## Service and Support

### HPE Support Services

HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support for need for your IT and business.

### Connect your devices

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%<sup>1</sup> reduction in down time, near 100%<sup>2</sup> diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support.

1- IDC 2 - HP CSC reports 2014 - 2015

### Recommended Support

#### **Standard: HPE Foundation Care 24x7, three-year Support Service**

HPE Foundation Care 24x7 gives you access to Hewlett Packard Enterprise 24 hours a day, seven days a week for assistance on resolving issues. This service includes need based Hardware onsite response within four hours. In addition, collaborative software support is included in this service that provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.

<https://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en>

#### **Optimized: HPE Proactive Care\* with 24x7 coverage, three year Support Service**

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to Hewlett Packard Enterprise, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

### Parts and Materials

Hewlett Packard Enterprise will provide Hewlett Packard Enterprise-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

### Related Services

#### **HPE Server Hardware Installation**

Provides for the basic hardware installation of Hewlett Packard Enterprise branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://www.hpe.com/h20195/V2/GetPDF.aspx/5981-9356EN.pdf>

#### **HPE Installation and Startup Service**

Provides for the installation and startup of Hewlett Packard Enterprise technology including BladeSystems, C-Class enclosure, HPE ProLiant c-Class and Integrity server blades, storage blades, SAN switch blades, HPE Virtual Connect modules (Ethernet and Fibre Channel), Ethernet network interconnects, and InfiniBand, as well as the installation of one supported operating system type (Windows® or Linux).

#### **HPE Technology Services Support Credits**

## Service and Support

Offer flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

---

### HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. <http://www.hpe.com/ww/learn>

---

### HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>

The Hewlett Packard Enterprise Support Center Mobile App\* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a Hewlett Packard Enterprise warranty, HPE Support Service or Hewlett Packard Enterprise contractual support agreement.

\*HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>



## Pre-configured Models

	Entry Models	Base Models
<b>[SKU Number]</b>	838502-xx1	838503-xx1
<b>Model Name</b>	HPE ProLiant ML110 Gen9 E5-2603v4 8GB-R B140i 4LFF NHP 350W PS Entry Server	HPE ProLiant ML110 Gen9 E5-2620v4 8GB-R B140i 4LFF 350W PS Base Server
<b>Processor</b>	Intel® Xeon® E5-2603v4	Intel® Xeon® E5-2620v4
<b>Number of Processors</b>	One	
<b>Memory</b>	8GB (1x8GB Registered DIMMs, 2400 MHz)	
<b>Network Controller</b>	Broadcom 5717 Dual-port 1GbE	
<b>Storage Controller</b>	HPE Dynamic Smart Array B140i	
<b>Hard Drive</b>	None ship standard	
<b>Internal Storage</b>	4 LFF HDD Bays (Non Hot Plug)	4 LFF HDD Bays (Hot Plug)
<b>Optical Drive Bay</b>	1; (Optional: DVD-ROM, DVD-RW)	
<b>Optical Drive</b>	Optional Slim Optical Bay (SATA DVD-RW/ROM Optical Drive)	
<b>PCI-Express Slots</b>	5 PCIe 3.0 slots (without risers)	
<b>Power Supply</b>	(1) 350W ATX Power Supply	(1) HPE 350W ATX Power Supply
<b>Fans</b>	1 non hot plug, non-redundant	
<b>Management</b>	iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional), iLO Scale-out (optional only for DL), iLO Advanced (optional)	
<b>Form Factor</b>	Tower (4.5U)	
<b>Warranty</b>	Server Warranty includes 3-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response.	

<b>Country Code Key</b>	xx1 = B21	Worldwide
	xx1 = 001	US
	xx1 = 031	UK
	xx1 = 291	Japan
	xx1 = 371	AP
	xx1 = 421	EU
	xx1 = AA1	PRC

**NOTE:** Not all models are available in all regions. Check with your local country Hewlett Packard Enterprise offices for availability.

## Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.
2. FIO indicates that this option is only available as a factory installable option.
3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

### Step 1: Base Configuration (choose one of the following configurable models)

<b>[Chassis]</b>	HP ProLiant ML110 Gen9 Non-hot Plug 4LFF Configure-to-order Server	HP ProLiant ML110 Gen9 Hot Plug 4LFF Configure-to-order Server	HP ProLiant ML110 Gen9 Hot Plug 8SFF Configure-to-order Server
<b>SKU Number</b>	776933-B21	776934-B21	776935-B21
<b>Processor</b>	1	1	1
<b>DIMM Slots</b>	8 DIMM slots for RDIMM, LRDIMM DDR4 Memory		
<b>Storage Controller</b>	HPE Dynamic Smart Array B140i		
<b>PCIe</b>	5 PCIe 3.0 Slots		
<b>Drive Cage</b>	4LFF Non Hot Plug	4LFF Hot Plug	8SFF Hot Plug
<b>Network Controller</b>	Broadcom 5717 Dual-port 1GbE		
<b>Fans</b>	1 non hot plug, non-redundant		
<b>Management</b>	iLO Management (standard), Intelligent Provisioning (standard)		
<b>USB</b>	2 front, 2 internal, 4 rear		

### Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

- HPE Processors** Select one or two processors from Core Options-Processor section below,
- If one processor is desired, select one xxxxxx-L21
  - If two processors are desired, select one xxxxxx-L21 and one xxxxxx-B21.
  - Up to 2 processors supported. Mixing different processor models is not supported.
  - DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

For the Intel® C600 Chipset E5-2600 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 2600x v#, 2 = number of CPUs in a Node, 6 is socket/segment designation, 00 = Processor SKU, x = L for low power SKUs and v# (not yet designated) = version number.

- HPE Memory** Select one or more memory from Core options-Memory section below,
- LRDIMM, RDIMM are all distinct memory technologies and cannot be mixed within a server. The majority of ProLiant Gen9 servers support LRDIMM and RDIMM.
  - HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant Server. HPE SmartMemory is required to realize the memory performance improvements and enhanced functionality listed in this document for Gen9.
  - If only one processor is installed, only half of the total DIMM slots are available. When populating with two processors all DIMM slots are available.
  - Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, see: <http://www.hp.com/go/proliant-energy-efficient>.

## Configuration Information - Factory Integrated Models

Depending on the memory configuration and processor model, the memory speed may run at 2133MHz, 1866MHz, 1600MHz or 1333MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: <http://www.hp.com/go/ddr4config>.

### HPE Power Supplies

Select one or more power supplies from Core Options-Power Supplies section below:

- Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <http://www.hpe.com/go/hppoweradvisor>.
- By RPS Enablement Kit power options, mixing of power supplies in the same RPS enablement kit is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

## Step 3: Choose Additional Factory Integratable Options

### HPE Networking

Select a standup NIC adapter from Core Options-Networking section below,

- Please see the QuickSpecs for Technical Specifications and additional information: <http://www.hpe.com/go/ProLiantNICs>.
- These options are upgradeable and can be changed from the original configuration after the server is shipped.
- For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

### HPE Drives

Select one or more drives from Core Options-HPE Drives section below:

- The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.
- Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.
- The HPE ProLiant Gen9 Smart Storage solutions are equipped with re-designed Small Form Factor (SFF 2.5 in) and Large Form Factor (LFF 3.5 in) hot plug carriers for HPE Qualified Hard Drives and Solid State Drives. These new carriers provide status and activity indicators as well as caution indicators for "Do Not Remove."

### HPE Graphics Options

Select one or more graphics adapter from Additional Options section below.

- Please see the HPE Power Advisor for estimated power consumption of your individual system configuration prior to installing GPUs. The HPE Power Advisor is located at: <http://www.hpe.com/go/hpepoweradvisor>.
- This section may contain FIO options, please see HPE Computation & Graphics Accelerators section below.

### HPE Unique Options

Select one or more Unique options from Core Options section below.

- This section may contain FIO options, please see the Unique options section below.
- FIO indicates that this option is only available as a factory installable option.

## Configuration Information - Factory Integrated Models

**HPE Cooling Options** Select one or more Fan Kits from Core Options section below.

- This section may contain FIO options, please see HPE Cooling Options section below.
- FIO indicates that this option is only available as a factory installable option.

**HPE Storage Controllers** Select one or more Storage options from Additional Options section below.

- The embedded B140i controller will operate in UEFI only mode. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22.
- This section may contain FIO options, please see HPE Storage Controllers section below.
- FIO indicates that this option is only available as a factory installable option.

## Core Options

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

<b>HPE Unique Options</b>	HP ML110 Gen9 Mini SAS H240 Cable Kit <b>NOTE:</b> Must be selected for H240 controller. 1 cable kit is required for Hot Plug 4LFF 2 cable kits are required for below: - Hot Plug 4+4 LFF (with additional drive cage) - 8SFF	789648-B21
	HP ML110 Gen9 Mini SAS P440/P840 Cable Kit <b>NOTE:</b> Must be selected for P440/P840 controller. 1 cable kit is required for P440x1 2 cable kits are required for P840x1	789651-B21
	HP ML110 Gen9 System Fan Upgrade Kit <b>NOTE:</b> When any E5-1600 processor kit or SAS SSD is selected, then this option kit must be ordered.	789654-B21
	HP ML110 Gen9 PCI Fan and Baffle Kit <b>NOTE:</b> If any PCIe card is selected, then this option kit must be selected. This option kit cannot be selected if no PCIe card is ordered.	784580-B21
	HP ML110 Gen9 Redundant Power Supply Enablement Kit <b>NOTE:</b> If this kit must be selected when 750W CS Gold Ht Plg Pwr Supply Kit is ordered.	784582-B21
	HP AHCI-Enable FIO Setting <b>NOTE:</b> This needs to be selected when Advanced Host Controller Interface mode is required on B140i controller.	801845-B21
	HP ML150 Gen9 Dedicated iLO Management Port Kit	780310-B21

<b>HPE Processors</b>	<b>E5-2600v4 series Processors</b> HPE ML110 Gen9 Intel® Xeon® E5-2609v4 (1.7GHz/8-core/20MB/85W) FIO Processor Kit 826102-L21 HPE ML110 Gen9 Intel® Xeon® E5-2603v4 (1.7GHz/6-core/15MB/85W) FIO Processor Kit 826103-L21 HPE ML110 Gen9 Intel® Xeon® E5-2630Lv4 (1.8GHz/10-core/25MB/55W) FIO Processor Kit 826104-L21 HPE ML110 Gen9 Intel® Xeon® E5-2620v4 (2.1GHz/8-core/20MB/85W) FIO Processor Kit 826101-L21 HPE ML110 Gen9 Intel® Xeon® E5-2623v4 (2.6GHz/4-core/10MB/85W) FIO Processor Kit 826105-L21 HPE ML110 Gen9 Intel® Xeon® E5-2640v4 (2.4GHz/10-core/25MB/90W) FIO Processor Kit 826100-L21 HPE ML110 Gen9 Intel® Xeon® E5-2660v4 (2.0GHz/14-core/35MB/105W) FIO Processor Kit 826099-L21 <b>E5-1600v4 series Processors</b> HPE ML110 Gen9 Intel® Xeon® E5-1603v4 (2.8GHz/4-core/10MB/140W) FIO Processor Kit 826106-L21 HPE ML110 Gen9 Intel® Xeon® E5-1620v4 (3.5GHz/4-core/10MB/140W) FIO Processor Kit 826107-L21 HPE ML110 Gen9 Intel® Xeon® E5-1607v4 (3.1GHz/4-core/20MB/140W) FIO Processor Kit 826108-L21	
-----------------------	--	--

## Core Options

HPE ML110 Gen9 Intel® Xeon® E5-1660v4 (3.2GHz/8-core/20MB/140W) FIO Processor Kit	826110-L21
HPE ML110 Gen9 Intel® Xeon® E5-1680v4 (3.4GHz/8-core/20MB/140W) FIO Processor Kit	826111-L21
<b>E5-1600v3 series Processors</b>	
HP ML110 Gen9 Intel® Xeon® E5-1603v3 (2.8GHz/4-core/10MB/140W) FIO Processor Kit	783017-L21
HP ML110 Gen9 Intel® Xeon® E5-1620v3 (3.5GHz/4-core/10MB/140W) FIO Processor Kit	783021-L21
HP ML110 Gen9 Intel® Xeon® E5-1650v3 (3.5GHz/6-core/15MB/140W) FIO Processor Kit	783023-L21

### HPE Memory

#### Registered DIMMs (RDIMMs) for E5-2600v3 Series

HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726717-B21
HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726718-B21
HP 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Registered Memory Kit	759934-B21
HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	726719-B21
HP 32GB (1x32GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Registered Memory Kit	728629-B21
HP 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Registered Standard Memory Kit	803026-B21
HP 8GB (1x8GB) Single Rank x4 DDR4-2133 CAS-15-15-15 Registered Standard Memory Kit	803028-B21

#### Load Reduced DIMMs (LRDIMMs) for E5-2600v3 Series

HP 16GB (1x16GB) Dual Rank x4 DDR4-2133 CAS-15-15-15 Load Reduced Memory Kit	726720-B21
--	------------

#### Registered DIMMs (RDIMMs) for E5-2600v4 Series

HP 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805347-B21
HPE 8GB (1x8GB) Single Rank x8 DDR4-2400 CAS-17-17-17 Registered Standard Memory Kit	851353-B21
HP 16GB (1x16GB) Single Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805349-B21
HPE 16GB (1x16GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	836220-B21
HP 32GB (1x32GB) Dual Rank x4 DDR4-2400 CAS-17-17-17 Registered Memory Kit	805351-B21

### HPE Optical Drives

HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive	726536-B21
HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive	726537-B21

### HPE Drives

**NOTE:** User may select any combination of SAS or SATA Hard Drives. However, if RAID is selected and both SAS and SATA Hard Drives have been selected, then only the SAS Drives will be used in the RAID set.

**NOTE:** If B140i is the primary controller, user can only select SATA drives.



## Core Options

**NOTE:** SAS drives require the selection of a SAS controller. See card lists in Controllers section.

### SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	872481-B21
HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872479-B21
HP 1.2TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	781518-B21
HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive	718162-B21
HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty DS Digitally Signed Firmware HDD	870759-B21
HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	870765-B21
HP 900GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	785069-B21
HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652589-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870757-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	870763-B21
HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872477-B21
HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759212-B21
HP 600GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	781516-B21
HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652583-B21
HP 450GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759210-B21
HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652572-B21
HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870753-B21
HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872475-B21
HP 300GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	759208-B21
HP 300GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	785067-B21
HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652564-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652605-B21

### SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

HPE 1TB 12G SAS 7.2K rpm SFF (2.5in) SC Midline 1yr Warranty Hard Drive	832514-B21
---	------------

### SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives

HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	765424-B21
---	------------

## Core Options

HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737394-B21
HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737261-B21
<b>SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives</b>	
HPE 10TB 12G SAS 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive	857644-B21
HPE 8TB 12G SAS 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive	861590-B21
HPE 8TB 12G SAS 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive	819201-B21
HPE 8TB 6G SATA 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive	819203-B21
HPE 6TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	861754-B21
HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765259-B21
HPE 6TB 12G SAS 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive	846514-B21
HPE 6TB 6G SATA 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive	846510-B21
HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	761477-B21
HPE 4TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	861756-B21
HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765257-B21
HPE 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	818367-B21
HPE 3TB 12G SAS 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive	846528-B21
HPE 2TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	818365-B21
HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652766-B21
HPE 1TB 12G SAS 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive	846524-B21
HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652753-B21
<b>12G SAS Write Intensive Hot Plug SFF (2.5-inch) Solid State Drives</b>	
HPE 1.6TB 12G SAS Write Intensive-1 SFF (2.5in) SC 3yr Wty Solid State Drive	846432-B21
HPE 800GB 12G SAS Write Intensive-1 SFF (2.5in) SC 3yr Wty Solid State Drive	846430-B21
<b>12G SAS Mixed Use Hot Plug SFF (2.5-inch) Solid State Drives</b>	
HPE 1.6TB 12G SAS Mixed Use-1 SFF (2.5in) SC 3yr Wty Solid State Drive	846436-B21
HPE 800GB 12G SAS Mixed Use-1 SFF (2.5in) SC 3yr Wty Solid State Drive	846434-B21
<b>SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives</b>	
HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	655710-B21
HP 2TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765455-B21
HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765453-B21
<b>SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives</b>	
HPE 10TB 6G SATA 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive	857648-B21
HPE 8TB 6G SATA 7.2K rpm LFF (3.5in) 512e SC Midline 1yr Warranty Hard Drive	861594-B21
HPE 6TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	861750-B21

## Core Options

HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765255-B21
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	753874-B21
HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	861752-B21
HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765253-B21
HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	693687-B21
HPE 4TB 6G SATA 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive	861678-B21
HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	628061-B21
HPE 3TB 6G SATA 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive	861693-B21
HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658079-B21
HPE 2TB 6G SATA 7.2K rpm LFF (3.5in) SC Standard 1yr Warranty Hard Drive	858596-B21
HPE 2TB 6G SATA 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive	861676-B21
HPE 1TB 6G SATA 7.2K rpm LFF (3.5in) SC Standard 1yr Warranty Hard Drive	858594-B21
HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	657750-B21
HPE 1TB 6G SATA 7.2K rpm LFF (3.5in) SC Midline 1yr Warranty Hard Drive	861691-B21
HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658071-B21
<b>SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives</b>	
HP 4TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive	801888-B21
HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	628065-B21
HP 3TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive	801886-B21
HP 2TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive	801884-B21
HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	659337-B21
HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	659339-B21
HP 1TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive	801882-B21
HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	659341-B21
<b>12G SAS Hot Plug SFF (2.5-inch) SC 512e Drives</b>	
HP 2TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765466-B21
HP 1.8TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 512e 3yr Warranty Hard Drive	791034-B21
HP 1TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765464-B21
HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC 512e Enterprise 3yr Warranty Hard Drive	748387-B21
<b>6G SATA Hot Plug SFF (2.5-inch) SC Read Intensive Solid State Drives</b>	
HPE 1.92TB 6G SATA Read Intensive SFF (2.5in) SC 1yr Warranty Solid State Drive	871770-B21
HPE 1.6TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869386-B21
HP 1.6TB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804605-B21

## Core Options

HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869384-B21
HPE 960GB 6G SATA Read Intensive SFF (2.5in) SC 1yr Warranty Solid State Drive	871768-B21
HP 800GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804599-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869378-B21
HP 480GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804593-B21
HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869376-B21
HP 240GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804587-B21
HPE 150GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	869374-B21
HP 120GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804581-B21
HP 80GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804575-B21
<b>6G SATA Hot Plug RI-3 SFF (2.5-inch) SC Solid State Drives</b>	
HP 3.84TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816929-B21
<b>6G SATA Hot Plug SFF (2.5-inch) SC Write Intensive Solid State Drives</b>	
HPE 1.6TB SATA 6G WI SFF SC DS SSD	872363-B21
HP 1.2TB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804677-B21
HPE 800GB SATA 6G WI SFF SC DS SSD	872359-B21
HP 800GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804671-B21
HPE 400GB SATA 6G WI SFF SC DS SSD	872355-B21
HP 400GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804665-B21
HP 200GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804639-B21
<b>6G SATA Hot Plug SFF (2.5-inch) SC Mixed Use Solid State Drives</b>	
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872352-B21
HP 1.6TB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804631-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872348-B21
HP 800GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804625-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	872344-B21
HP 480GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	832414-B21
HP 200GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804613-B21
<b>6G SATA Hot Plug MU-3 SFF (2.5-inch) SC Solid State Drives</b>	
HP 1.92TB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	817011-B21
HP 960GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816995-B21
HP 480GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816985-B21
<b>6G SATA Hot Plug SFF Value Endurance (2.5-inch) Enterprise Value M1 Solid State Drives</b>	
HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764929-B21
HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764927-B21
HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764925-B21

## Core Options

HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764923-B21
<b>6G SATA Hot Plug LFF (3.5-inch) SC Read Intensive Solid State Drives</b>	
HPE 1.6TB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	869388-B21
HP 1.6TB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804608-B21
HP 800GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804602-B21
HPE 480GB SATA 6G Read Intensive LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	869380-B21
HP 480GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804596-B21
HP 240GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804590-B21
HP 120GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804584-B21
HP 80GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804578-B21
<b>6G SATA Hot Plug LFF (3.5-inch) RI-3 SCC SSD</b>	
HP 3.84TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816933-B21
<b>6G SATA Hot Plug LFF (3.5-inch) SC Write Intensive Solid State Drives</b>	
HP 1.2TB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804680-B21
HP 800GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804674-B21
HP 400GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804668-B21
HP 200GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804642-B21
<b>6G SATA Hot Plug LFF (3.5-inch) SC Mixed Use Solid State Drives</b>	
HP 1.6TB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804634-B21
HPE 960GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	872350-B21
HP 800GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804628-B21
HPE 480GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD	872346-B21
HP 480GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	832417-B21
HP 200GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid State Drive	804616-B21
<b>6G SATA Hot Plug LFF (3.5-inch) MU-3 SCC SSD</b>	
HP 960GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816999-B21
HP 480GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816989-B21
<b>Hard Drive Blank Kits</b>	
HP Large Form Factor Hard Drive Blank Kit	666986-B21
HP Small Form Factor Hard Drive Blank Kit	666987-B21
<b>Hard Drive Kits</b>	
HP ML110 Gen9 4LFF Hot Plug Drive Cage Kit	784584-B21
HP ML110 Gen9 8SFF Hot Plug Drive Cage Kit	784586-B21
<b>M.2 SSD</b>	
HP Dual 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers	777894-B21
<b>NOTE: M.2 SSD ML-DL Enablmt Kit can be built RAID 0, 1 by using B140i controller.</b>	
<b>- When HPE 120GB M.2 SSD ML-DL Dual Enablmt Kit is ordered, then it can support RAID 0, 1.</b>	

## Core Options

HP 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers	788028-B21
--	------------

### HPE Networking

#### 1 Gigabit Ethernet adapters

HP Ethernet 1Gb 4-port 331T Adapter	647594-B21
HP Ethernet 1Gb 2-port 332T Adapter	615732-B21
HP Ethernet 1Gb 2-port 361T Adapter	652497-B21
HP Ethernet 1Gb 4-port 366T Adapter	811546-B21

#### 10 Gigabit Ethernet adapters

HP Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21
HP Ethernet 10Gb 2-port 561T Adapter	716591-B21
HP Ethernet 10Gb 2-port 546SFP+ Adapter	779793-B21
HPE Ethernet 10Gb 2-port 562SFP+ Adapter	727055-B21

### HPE Power Supplies

#### HPE Entry-Level Power Supplies

HPE 750W Common Slot Gold Hot Plug Power Supply Kit	512327-B21
HPE 350W ATX-Gen9 Power Supply FIO Kit	776442-B21
HPE 550W ATX-Gen9 Power Supply Kit	776444-B21
HP ML110 Gen9 Redundant Power Supply Enablement Kit	784582-B21

**NOTE:** If this kit must be selected when 750W CS Gold Ht Plg Pwr Supply Kit is ordered.

**NOTE:** Check power advisor for power consumption for the customer usage case. Power specifications and technical content for all HPE Server power supplies can be found at <http://www.hp.com/go/proliant/powersupply>.

### HPE Computation and Graphics Accelerators

HP NVIDIA Quadro K2200 Graphics Accelerator	J0G89A
HP ML110 Gen9 GPU Supporting Holder Kit	787006-B21
HPE NVIDIA Quadro M2000 Graphics Accelerator	P8Y48A

**NOTE:** Only the above listed Graphics cards are HPE standard supported options in this server.

**NOTE:** The NVIDIA Quadro modules are supported only on 64-bit versions of Linux and Windows operating systems as well as on Virtual Machine client operating systems. The supported bare metal operating systems are RHEL6, SLES 11 and Windows Server 2012 R2.

**NOTE:** Please see the HPE Power Advisor for estimated power consumption of your individual system configuration prior to installing GPUs. The HPE Power Advisor is located at: <http://www.hp.com/go/hppoweradvisor>.

### HPE Cooling Options

HP ML110 Gen9 PCI Fan and Baffle Kit	784580-B21
--------------------------------------	------------

**NOTE:** If any PCIe card is selected, then this option kit must be selected. This option kit cannot be selected if no PCIe card is ordered.

HP ML110 Gen9 System Fan Upgrade Kit	789654-B21
--------------------------------------	------------

**NOTE:** When any 140W processor kit or SAS SSD is selected, then this option kit must be ordered.



## Additional Options

**NOTE:** Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

### HPE Insight Software

#### HPE Insight Control

HPE Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO LTU C6N36A

HPE Insight Control including 1yr 24x7 TSU E-LTU C6N28ABE

HPE Insight Management Media Kit C6N31A

**NOTE:** Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.

**NOTE:** Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24x7 HPE Software Technical Support and Update Service.

**NOTE:** Licenses ship without media. The HPE Insight Control Media Kit can be ordered separately, or can be downloaded at: <http://www.hp.com/go/insightupdates>.

**NOTE:** For additional license options please see the QuickSpecs

at: <https://www.hpe.com/h20195/v2/gethtml.aspx?docname=c04123391>.

### Embedded Management

#### HPE iLO Advanced

HPE iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU E6U64ABE

HPE iLO Advanced including 3yr 24x7 Tech Support and Updates 1-server LTU BD505A

HPE iLO Advanced including 1yr 24x7 Technical Support and Updates 1-server LTU 512485-B21

HPE iLO Advanced including 1yr 24x7 Technical Support and Updates Flexible Quantity LTU 512486-B21

HPE iLO Advanced including 1yr 24x7 Technical Support and Updates Tracking LTU 512487-B21

HPE iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU E6U59ABE

#### HPE iLO Essentials

HPE iLO Essentials including 3yr 24x7 Technical Support and Updates E-LTU E6U61ABE

HPE iLO Essentials including 1yr 24x7 Technical Support and Updates E-LTU E6U62ABE

HPE iLO Essentials including 3yr 24x7 Tech Support and Updates 1-server LTU BD774A

HPE iLO Essentials including 1yr 24x7 Tech Support and Updates 1-server LTU BD775A

### HPE Security

HP Trusted Platform Module 2.0 Kit 745823-B21

**NOTE:** HPE Trusted Platform Module 2.0 Option works with Gen9 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen8 servers or earlier generation variants.

**NOTE:** HPE Gen9 servers purchased earlier may need the latest firmware update to be compatible with the TPM 2.0 Option.

**NOTE:** HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

HP Trusted Platform Module Option 488069-B21

**NOTE:** The HPE Trusted Platform Module Option (488069-B21) is the TPM 1.2 version. Compatible server platforms include Gen8 and Gen9 servers

**NOTE:** HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

## Additional Options

### HPE Storage Controllers

#### SAS Controller

HP Smart Array P440/2GB FBWC 12Gb 1-port Int SAS Controller 820834-B21

HP Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller 726821-B21

HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller 726825-B21

HP Smart Array P840/4GB FBWC 12Gb 2-ports Int SAS Controller 726897-B21

**NOTE:** When additional 8SFF Drive cage is ordered and also P840 is selected, then must select one separate HPE ML110 Gen9 Mini SAS P440/P840 Cbl Kit.

HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller 761872-B21

**NOTE:** Smart Storage Battery included.

**NOTE:** Must select battery holder P/N: 786710-B21 when purchase P440.

**NOTE:** B140i can't mix with any standup internal controller.

HP Smart Array P840/4GB FBWC 12Gb 2-ports Int FIO SAS Controller 761874-B21

**NOTE:** Smart Storage Battery included.

**NOTE:** B140i can't mix with any standup internal controller.

**NOTE:** Must select P840/4G Controller when apply 16SFF.

**NOTE:** Must select P440/P840 Cable kit, 1 cable kit per controller.

**NOTE:** Must select P840/4G FIO Controller when additional drive cage is selected.

HP Smart Array P841/4GB FBWC 12Gb 4-ports Ext SAS Controller 726903-B21

HP ML110 Gen9 Mini SAS H240 Cable Kit 789648-B21

**NOTE:** Must be selected for H240 controller.

1 cable kit is required for Hot Plug 4LFF

2 cable kits are required for below:

- Hot Plug 4+4 LFF (with additional drive cage)

- 8SFF

HP ML110 Gen9 Mini SAS P440/P840 Cable Kit 789651-B21

**NOTE:** Must be selected for P440/P840 controller.

1 cable kit is required for P440x1

2 cable kits are required for P840x1

**NOTE:** Must select battery holder kit when P series FIO controller is selected.

#### SAS Controller Options

HP 96W Smart Storage Battery with 145mm Cable for DL/ML/SL Servers 727258-B21

#### HPE Host Bus Adapter

HP H240 12Gb 2-ports Int Smart Host Bus Adapter 726907-B21

HP H241 12Gb 2-ports Ext Smart Host Bus Adapter 726911-B21

HP H240 12Gb 2-ports Int FIO Smart Host Bus Adapter 761873-B21

**NOTE:** Must select for H240 controller.

1 cable kit is required for Hot Plug 4LFF.

2 cable kits are required for below:

- Hot Plug 4+4 LFF (with additional drive cage)

- 8SFF

#### Battery Holder

HP ML150 Gen9 Smart Storage Battery Holder Kit 786710-B21

**NOTE:** Only support P series controllers.

#### Optional Software

HPE SmartCache No Media 24x7 Technical Support 1-server LTU D7S26A

HPE SmartCache No Media 24x7 Technical Support Flexible LTU D7S27A

HPE SmartCache No Media 24x7 Technical Support E-LTU D7S27AAE

**NOTE:** HPE SmartCache is supported when one of the supported Smart Array Controllers is installed in the server.

## Additional Options

**NOTE:** HPE SmartCache comes standard (no licensing is required) if the HPE Smart Array P840 Controller is installed in the server.

**HPE Tape Backup** **NOTE:** For the complete range of tape drives, autoloaders, libraries and media see: <http://www.hp.com/go/tape>. For hardware and software compatibility of HPE tape backup products see: <http://www.hp.com/storage/SPOCK> and <http://www.hp.com/go/ebs>.  
**NOTE:** Limited to H241, P441, P841 when select External Tape Drive.

### Tape Drives

HPE StoreEver LTO-7 Ultrium 15000 External Tape Drive	BB874A
HPE StoreEver Mini-SAS High Density to 4-lane Mini-SAS External Fanout 2m Cable	K2R09A
HPE StoreEver Mini-SAS High Density to 4-lane Mini-SAS External Fanout 4m Cable	K2R10A

### HPE Disk Backup HPE RDX Removable Disk Backup System

HPE D3700 Enclosure	QW967A
HPE D3600 Enclosure	QW968A
HPE RDX+ 3TB USB 3.0 External Disk Backup System	P9L72A
HP RDX+ 500GB External Backup System	B7B66B
HP RDX+ 1TB External Backup System	B7B69B
HP RDX 2TB USB3.0 External Disk Backup System	E7X53B
HPE RDX+ External Docking System	C8S07B

### HPE Disk Storage Systems Disk Enclosures

HP D6000 w/35 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 140TB Bundle	E7W30A
HP D6000 w/70 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 280TB Bundle	E7W31A
HP D6000 Dual I/O Module Disk Enclosure	QQ695A
HP D6000 w/35 2TB 6G SAS 7.2K LFF Dual port MDL HDD 70TB Bundle	QQ697A
HP D6000 w/70 2TB 6G SAS 7.2K LFF Dual port MDL HDD 140TB Bundle	QQ698A
HP D6000 w/35 3TB 6G SAS 7.2K LFF Dual port MDL HDD 105TB Bundle	QQ699A
HP D6000 w/70 3TB 6G SAS 7.2K LFF Dual port MDL HDD 210TB Bundle	QQ700A
HPE D6000 w/70 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 560TB Bundle	M0T59A
HPE D6000 w/35 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL HDD 280TB Bundle	M0T58A

### HPE Rack Mount Consoles, KVM Switches, and Keyboards HPE Location Discovery Services

HPE Location Discovery Services LCD8500 Kit	TL052A
<b>NOTE:</b> Please see the <a href="#">HPE Location Discovery Services QuickSpecs</a> for information on additional options and product specifications.	

### HPE Rack Mount Consoles

HP LCD8500 1U US Rackmount Console Kit	AF630A
HP LCD8500 1U UK Rackmount Console Kit	AF631A
HP LCD8500 1U DE Rackmount Console Kit	AF632A
HP LCD8500 1U FR Rackmount Console Kit	AF633A
HP LCD8500 1U JP Rackmount Console Kit	AF642A
HP LCD8500 1U RU Rackmount Console Kit	AF643A
HP LCD8500 1U INTL Rackmount Console Kit	AF644A
HP LCD8500 1U US TAA Rackmount Console Kit	AF645A

## Additional Options

### HPE KVM Switches

HP USB Remote Access Key for G3 KVM Console Switches	AF650A
HP 0x1x8 G3 KVM Console Switch	AF651A
HP 0x2x16 G3 KVM Console Switch	AF652A
HP TAA 0x2x16 G3 KVM Console Switch	AF653A
HP KVM Console USB Interface Adapter	AF628A
HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF618A
HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software	AF619A
HP KVM Console USB 2.0 Virtual Media CAC Interface Adapter	AF629A
HP 1x4 USB/PS2 KVM Console Switch	AF611A
HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF620A
HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF621A
HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software	AF622A

### HPE USB Keyboard and Mouse

HP USB BFR with PVC Free US Keyboard/Mouse Kit	631341-B21
HP USB BFR with PVC Free Intl Keyboard/Mouse Kit	672097-B33
HP USB BFR with PVC Free UK Keyboard/Mouse Kit	631344-B21
HP USB BFR with PVC Free FR Keyboard/Mouse Kit	631346-B21
HP USB BFR with PVC Free ES Keyboard/Mouse Kit	631348-B21
HP USB BFR with PVC Free DE Keyboard/Mouse Kit	631358-B21
HP USB BFR with PVC Free JP Keyboard/Mouse Kit	631360-B21
HP USB BFR with PVC Free IT Keyboard/Mouse Kit	631362-B21
HP USB BFR with PVC Free CN Keyboard/Mouse Kit	631364-B21
HP USB BFR with PVC Free AE Keyboard/Mouse Kit	638212-B21
HP USB BFR with PVC Free RU Keyboard/Mouse Kit	638214-B21
HP USB BFR with PVC Free SE Keyboard/Mouse Kit	672097-103
HP USB BFR with PVC Free CH Keyboard/Mouse Kit	672097-113
HP USB BFR with PVC Free PT Keyboard/Mouse Kit	672097-133
HP USB BFR with PVC Free TR Keyboard/Mouse Kit	672097-143
HP USB BFR with PVC Free CZ Keyboard/Mouse Kit	672097-223
HP USB BFR with PVC Free FI Keyboard/Mouse Kit	672097-353
HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit	672097-373
HP USB BFR with PVC Free IN Keyboard/Mouse Kit	672097-D63
HP USB BFR with PVC Free KR Keyboard/Mouse Kit	672097-KD3

### HPE Other Options

HPE Rack LED Light Kit	BW939A
HP Kit LCD 1.83m Latch Display Port Cable	G7T29A

## HPE Uninterruptible HPE DirectFlow Three Phase UPS

### Power Systems (UPS)

#### Power Unit (1U UPS)

HPE R12000 DirectFlow - 1U Rackmount Uninterruptible Power System	G9Y75A
HPE R12000 DirectFlow - POD 1U Rackmount Uninterruptible Power System	AF478A
HPE RP12000/3 12000VA Three Phase INTL 6U Rackmount Uninterruptible Power System	AF437A

#### Input/Output Module Options for 1U UPS

HPE 32A 400-415 Volt Three Phase INTL R12000 DirectFlow UPS IEC309 Input/Output Module	AF488A
HPE 30A 400-415 Volt Three Phase NA R10000 DirectFlow UPS IEC309 Input/Output Module	AF489A

## Additional Options

HPE 32A 380 Volt Three Phase China R12000 DirectFlow UPS Unterminated Input/Output Module	AF490A
HPE 30A 480 Volt Three Phase NA R12000 DirectFlow UPS L22-30 Input/Output Module	AF491A
HPE 30A 480 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	AF492A
HPE 30A 400-415 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	G9Y76A
<b>Power Unit (2U UPS)</b>	
HPE R18000 DirectFlow - 2U Rackmount Uninterruptible Power System	AF479A
<b>Input/Output Module Options for 2U UPS</b>	
HPE 32A 400-415 Volt Three Phase INTL R18000 DirectFlow UPS IEC309 Input/Output Module	AF483A
HPE 30A 380 Volt Three Phase China R18000 DirectFlow UPS Unterminated Input/Output Module	AF485A
HPE 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF486A
HPE 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF487A
HPE 30A 400 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	D9Q02A
HPE 30A 400-415V Three Phase NA R18000 DirectFlow UPS 1:1 IEC309 Input/Output Module	AF484A
<b>NOTE: All Input/Output Modules support dual output outlets except the AF484A.</b>	
<b>Battery Pack Options</b>	
HPE DirectFlow UPS - 1U Rackmount Lithium-ion Battery Pack	AF480A
HPE DirectFlow UPS - 3U Rackmount VRLA Battery Pack	AF482A
HPE WW DirectFlow Secondary Battery Cable	AF497A
<b>NOTE: Please see the <a href="#">HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs</a> for information on additional options and product specifications.</b>	
<b>HPE Tower UPS</b>	
<b>HPE T750 G4 UPS Models</b>	
HPE T750 G4 NA/JP Uninterruptible Power System	J2P85A
HPE T750 G4 INTL Uninterruptible Power System	J2P88A
<b>HPE T1000 G4 UPS Models</b>	
HPE T1000 G4 NA/JP Uninterruptible Power System	J2P86A
HPE T1000 G4 INTL Uninterruptible Power System	J2P89A
<b>HPE T1500 G4 UPS Models</b>	
HPE T1500 G4 NA/JP Uninterruptible Power System	J2P87A
HPE T1500 G4 INTL Uninterruptible Power System	J2P90A
<b>HPE Rack/Tower UPS</b>	
<b>HPE R/T2200 G4 UPS Models</b>	
HPE R/T2200 G4 NA/JP Uninterruptible Power System	J2R00A
<b>HPE R/T3000 G4 UPS Models</b>	
HPE R/T3000 G4 Low Voltage NA/JP Uninterruptible Power System	J2R01A
HPE R/T3000 G4 High Voltage NA/JP Uninterruptible Power System	J2R02A
HPE R/T3000 G4 High Voltage INTL Uninterruptible Power System	J2R04A
<b>R1500 G4 Models</b>	
HPE R1500 G4 NA Uninterruptible Power System	J2Q99A
HPE R1500 G4 JP/TWN Uninterruptible Power System	J2R05A

## Additional Options

HPE R1500 G4 INTL Uninterruptible Power System J2R03A

### **R7000 Uninterruptible Power System (UPS)**

HPE R7000 4U 50A High Voltage NA/JP Uninterruptible Power System AF462A

HPE R7000 4U IEC-32A High Voltage INTL Uninterruptible Power System AF463A

### **R5000 Uninterruptible Power System (UPS)**

HPE R5000 3U L630 High Voltage NA/JP Uninterruptible Power System AF460A

HPE R5000 3U IEC309-32A High Voltage INTL Uninterruptible Power System AF461A

### **HPE UPS Options**

HPE R/T2200 G4 Extended Runtime Module J2R09A

HPE R/T3000 G4 Extended Runtime Module J2R10A

HPE 2U Rack/Tower UPS Shipping Kit L4Q11A

HPE DirectFlow UPS Management Card AF493A

**NOTE:** To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\) web page](#).

### **HPE USB and SD Options**

#### **HPE Enterprise Mainstream Flash Media Kits for Memory Cards**

HPE 32GB microSD Mainstream Flash Media Kit 700139-B21

HPE 8GB microSD Enterprise Mainstream Flash Media Kit 726116-B21

HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit 737953-B21

HP Dual 8GB microSD Enterprise Midline USB Kit 741279-B21

### **HPE Support Services**

#### **Foundation Care**

HPE 3 year Foundation Care 24x7 ML110 Gen9 Service U8JB1E

HPE 3 year Foundation Care 24x7 wDMR ML110 Gen9 Service U8JB2E

HPE 3 year Foundation Care 24x7 wCDMR ML110 Gen9 Service U8JG2E

#### **Proactive Care**

HPE 3 year Proactive Care 24x7 ML110 Gen9 Service U8JB3E

HPE 3 year Proactive Care 24x7 with DMR ML110 Gen9 Service U8JB4E

HPE 3 year Proactive Care 24x7 with CDMR ML110 Gen9 Service U8JG3E


#### **Installation Services**

HPE Installation ML310e/ML110 Service U6G21E



## Memory

### Memory Population guidelines

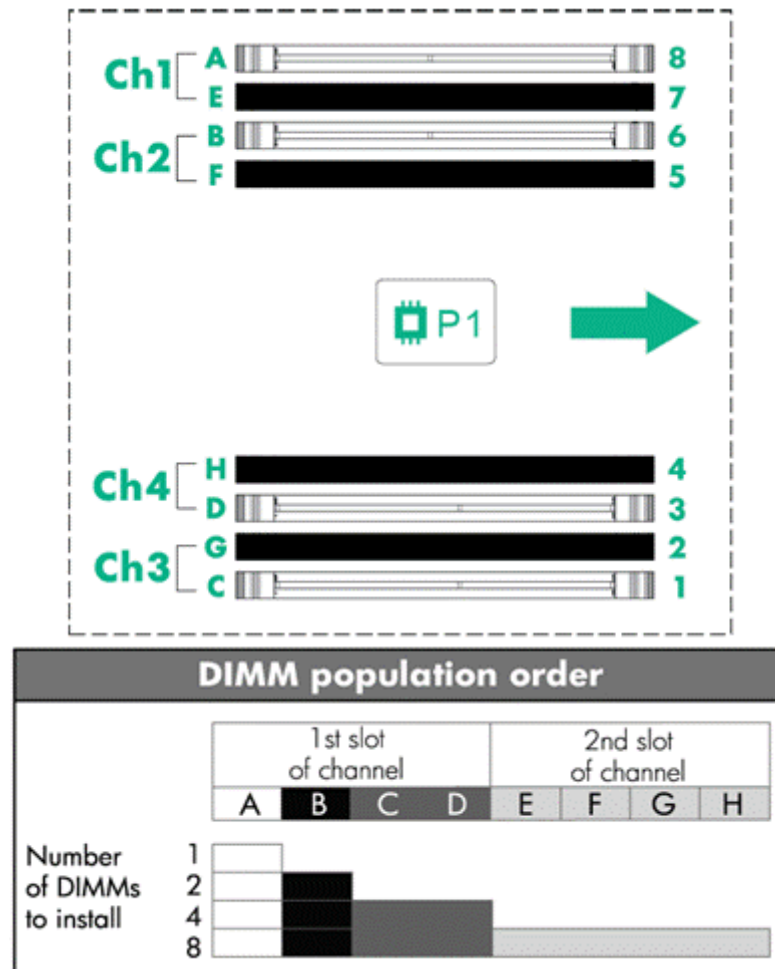

#### General Memory Population Rules and Guidelines:

- Install DIMMs only if the corresponding processor is installed.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors and load the channels similarly whenever possible.
- White DIMM slots denote the first slot to be populated in a channel.
- Place the DIMMs with the highest number of ranks in the white slot when mixing DIMMs of different ranks on the same channel.
- Do not mix RDIMMs or LRDIMMs.
- Quad rank RDIMMs are not supported in HPE ProLiant ML110 Gen9 servers.
- Quad rank LRDIMMs are capable of up to three DIMMs per channel.
- RDIMMs operating at 1.2V.
- DIMMs of different speeds may be mixed in any order; the server will select a common optimal speed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the memory type and number of installed processors.
- To realize the performance memory capabilities listed in this document, HPE SmartMemory is required.
- There are four (4) channels per processor. There are two (2) DIMM slots for each memory channel; eight (8) total slots. Memory channels 1 and 3 consist of the two (2) DIMMs that are furthest from the processor. Memory channels 2 and 4 consist of the two (2) DIMMs that are closest to the processor.

## Memory

## Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E5-2600v3 Series Processor Family

Memory Bandwidth and Capacity						
[DIMM Type]	Registered DIMMs (RDIMMs)					Load Reduced (LRDIMMs)
HPE SKU P/N	726717-B21	726718-B21	759934-B21	726719-B21	728629-B21	726720-B21
DIMM Rank	Single Rank	Single Rank	Dual Rank	Dual Rank	Dual Rank	Dual Rank
DIMM Capacity	4GB	8GB	8GB	16GB	32GB	16GB
Voltage	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
DRAM Depth [bit]	512M	1G	512M	1G	1G	2G
DRAM Width [bit]	x8	x4	x8	x4	x4	x4
DRAM Density	4Gb	4Gb	4Gb	4Gb	4Gb	8Gb
CAS Latency	15-15-15	15-15-15	15-15-15	15-15-15	15-15-15	15-15-15
DIMM Native Speed (MT/s)	2133	2133	2133	2133	2133	2133
<b>SLOTS THAT CAN BE POPULATED</b>						
8 slot servers	8	8	8	8	8	8
<b>MAXIMUM CAPACITY (GB)</b>						
	32	64	64	128	256	128
<b>POPULATED DIMM SPEED (MT/s)</b>						
1 DIMM Per Channel	2133	2133	2133	2133	2133	2133
2 DIMM Per Channel	2133	2133	2133	2133	2133	2133
3 DIMM Per Channel	1600	1600	1600	1600	1600	1866

## Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E5-2600v4 Series Processor Family

Memory Bandwidth and Capacity				
[DIMM Type]	Registered DIMMs (RDIMMs)			
HPE SKU P/N	805347-B21	805349-B21	836220-B21	805351-B21
DIMM Rank	Single Rank	Single Rank	Dual Rank	Dual Rank
DIMM Capacity	8GB	16GB	16GB	32GB
Voltage	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
DRAM Depth [bit]	1G	2G	1G	2G
DRAM Width [bit]	x8	x4	x4	x4
DRAM Density	8Gb	8Gb	4Gb	8Gb
CAS Latency	17-17-17	17-17-17	17-17-17	17-17-17

## Memory

<b>DIMM Native Speed (MT/s)</b>	2400	2400	2400	2400
<b>SLOTS THAT CAN BE POPULATED</b>				
8 slot servers	8	8	8	8
<b>MAXIMUM CAPACITY (GB)</b>				
	64	128	128	256
<b>POPULATED DIMM SPEED (MT/s)</b>				
<b>1 DIMM Per Channel</b>	2400	2400	2400	2400
<b>2 DIMM Per Channel</b>	2133	2133	2133	2133
<b>3 DIMM Per Channel</b>	n/a	n/a	n/a	n/a

### DIMM slot and configuration diagram

#### DIMM slot and configuration diagrams

- Population order; start with "A" first, "B" second, "C" third, etc.
- When one processor is installed, install DIMMs in sequential alphabetic order: A, B, C, D, E, F.
- When two processors are installed, install DIMMs in sequential alphabetic order: CPU1-A, CPU2-A, CPU1-B, CPU2-B, CPU1-C, CPU2-C

	CPU 1		CPU 2		
	Slot #	population order	Slot #	population order	
Chnl 3	1	C	1	C	Chnl 1
	2	G	2	G	
	CPU 1		CPU 2		
	Slot #	population order	Slot #	population order	
Chnl 4	3	D	3	B	Chnl 2
	4	H	4	F	
	CPU 1		CPU 2		
	Slot #	population order	Slot #	population order	
Chnl 2	5	F	5	H	Chnl 4
	6	B	6	D	
	CPU 1		CPU 2		
	Slot #	population order	Slot #	population order	
Chnl 1	7	E	7	G	Chnl 3
	8	A	8	C	

### Memory Speed by Processor Model

Processor Models	Supported Memory Speeds
E5-1603v3	1866MT/s
E5-1620v3, E5-1650v3	2133MT/s
E5-2609v4, E5-2603v4	1866MT/s

## Memory


E5-2630Lv4, E5-2620v4, E5-2623v4, E5-2640v4	2133MT/s
E5-2660v4, E5-1603v4, E5-1620v4, E5-1607v4, E5-1660v4, E5-1680v4	2400MT/s

Standard and Maximum Memory Capacity (Pre-configured Models)	Pre Configured Models	Standard Memory	Maximum Memory Plus Optional Memory	Standard Memory Replaced with Optional Memory
	E5-2620v4, E5-2603v4	8GB (1x8GB)	232GB (7x32GB, 1x8GB)	256GB (8x32GB)

### DDR4 memory options part number decoder

**NOTE:** Capacity references are rounded to the common gigabyte (GB) values.

- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB
- 32GB = 32,768MB

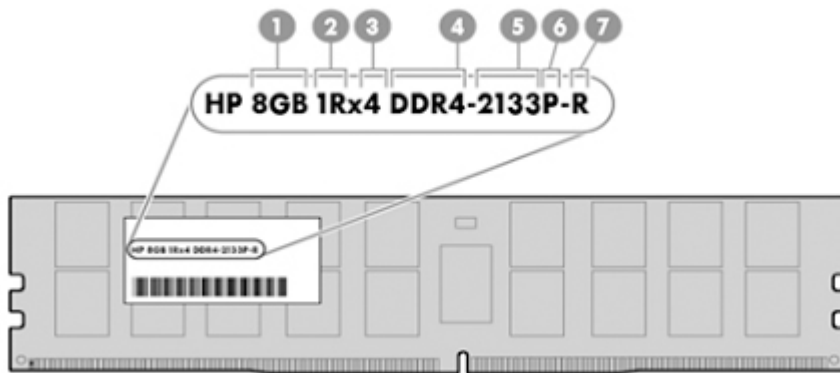


1. Capacity: 4GB/8GB/16GB/32GB
2. Rank: 1R = Single-rank; 2R = Dual-rank; 4R = Quad-rank
3. Data width: x4 = 4-bit; x8 = 8-bit
4. Memory generation: DDR4
5. Maximum memory speed: 2133 MT/s
6. CAS latency: P = 15
7. DIMM type: R = RDIMM (registered); L = LRDIMM (load reduced)

### Storage

4-bay LFF non-hot-plug drive model

1-4

4 x LFF SATA/SSD Non-hot-plug Hard Drive Bays

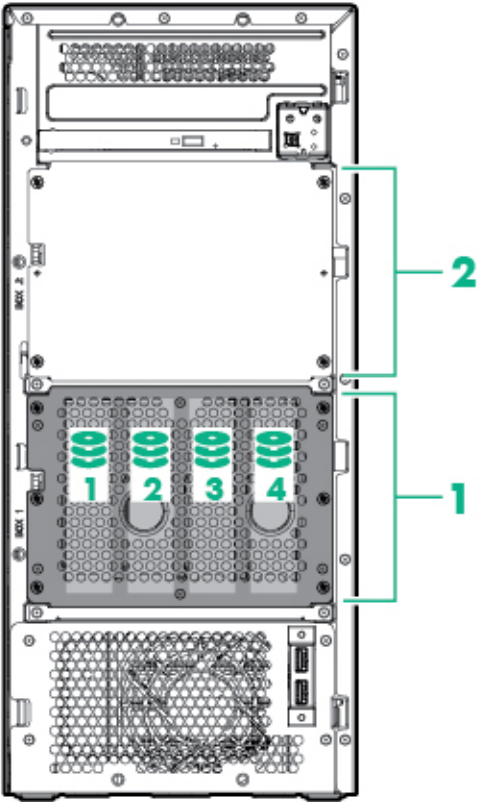

4-bay LFF hot-plug drive model


1 x 1-4

4 x LFF SAS/SSD Hot Pluggable Hard Drive Bays

1 x 2-4

4 x LFF SAS/SSD Hot Pluggable Hard Drive Bays


### Storage

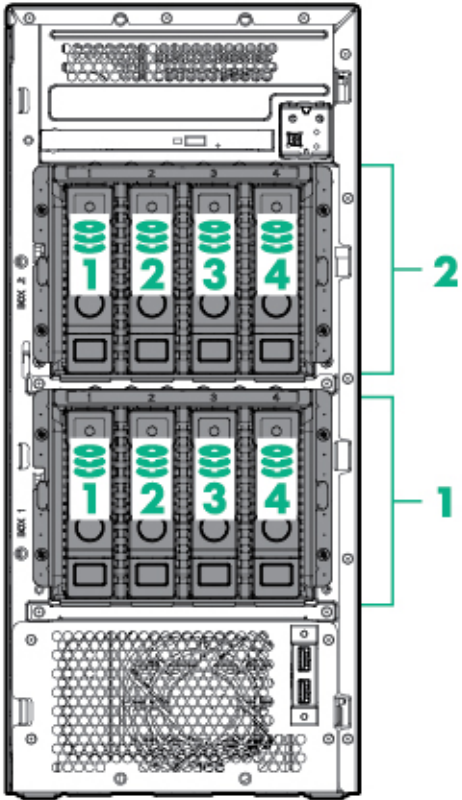

8-bay SFF hot-plug drive model

- 1 x 1-8      8 x SFF SATA/SSD Hot Pluggable Hard Drive Bays
- 1 x 2-8      8 x SFF SATA/SSD Hot Pluggable Hard Drive Bays

# Storage

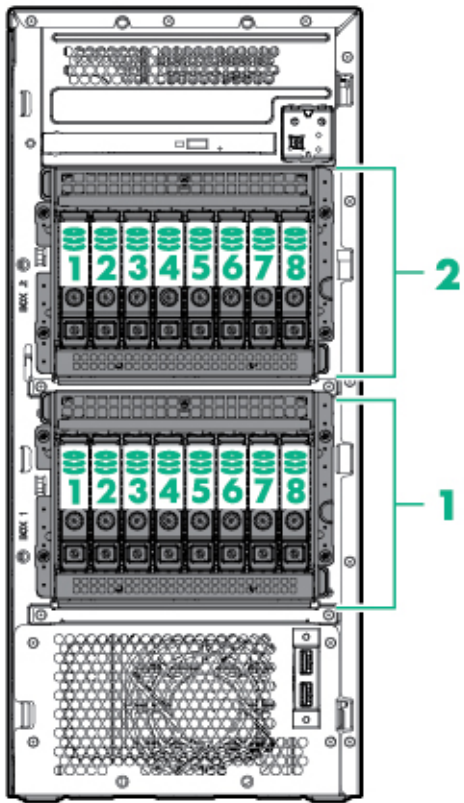

### Maximum Storage Capacity -

Total (8 LFF Drive) 80 TB

Total (16 SFF Drive) 32 TB

## Technical Specifications

<b>System Unit</b>	<b>Tower Dimensions</b>	17.32(H) x 7.68(W) x 18.92(D) in (44 x 19.5 x 48.05 cm)
	<b>Tower Weight</b>	Minimum: 27.56lb (12.5kg) Maximum: 55lb (24.9g)
	<b>Input Requirements</b>	Range Line Voltage 100 to 240 VAC For 350W & 550W Power Supply:8A (at 100~240 VAC)  Rated Input Current 50 to 60 Hz  Rated Input Power For 550 W Power Supply:< 639 W (at 100 VAC),< 605 W (at 200 VAC) For 350 W Power Supply:< 427 W (at 100 VAC),< 427 W (at 200 VAC)
	<b>BTU Rating</b>	Maximum For 550 W Power Supply:2204 BTU/hr (at 100 VAC),2113 BTU/hr (at 200 VAC) For 350 W Power Supply:1452 BTU/hr (at 100 VAC),1544 BTU/hr (at 200 VAC)
	<b>Power Specifications</b>	To review typical system power ratings use the Power Advisor which is available via the online tool located at URL: <a href="http://www.hp.com/go/proliant-energy-efficient">http://www.hp.com/go/proliant-energy-efficient</a> or <a href="http://www.hp.com/go/hppoweradvisor">http://www.hp.com/go/hppoweradvisor</a> - Click on the system of interest.
	<b>Power Supply Output</b>	Rated Steady-State Power For 550 W Power Supply:550 W (at 100 VAC),550 W (at 200 VAC), Maximum Peak Power For 350 W Power Supply:350 W (at 100 VAC),350 W (at 200 VAC),
	<b>System Inlet Temperature</b>	Standard Operating Support 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 304.8 m (1.8°F per every 1000 ft) above sea level to a maximum of 3048 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).  Extended Ambient Operating Support For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3048m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <a href="http://www.hp.com/servers/ashrae">http://www.hp.com/servers/ashrae</a> .  For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3048 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <a href="http://www.hp.com/servers/ashrae">http://www.hp.com/servers/ashrae</a> .
		System performance may be reduced if operating in the extended ambient operating range or with a fan fault. <b>NOTE: Supports A3 extended ambient.</b>



## Technical Specifications

	Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr(36°F/hr).
<b>Relative Humidity</b>	Operating	Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity.
	Non-operating	5% to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
<b>Altitude</b>	Operating	3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457m/min (1500 ft/min).
	Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457m/min (1500 ft/min).
<b>Acoustic Noise</b>	Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).	
	<b>Idle</b>	
	L WAd	3.6 Bels (LFF Non Hot-Plug Base) 3.6 Bels (LFF Hot-plug Base) 4.1 Bels (LFF Hot-plug Performance)
	L pAm	21 dBA (LFF Non Hot-Plug Base) 21 dBA (LFF Hot-plug Base) 27 dBA (LFF Hot-plug Performance)
	<b>Operating</b>	
	L WAd	3.6 Bels (LFF Non Hot-Plug Base) 3.7 Bels (LFF Hot-plug Base) 4.2 Bels (LFF Hot-plug Performance)
	L pAm	21 dBA (LFF Non Hot-Plug Base) 21 dBA (LFF Hot-plug Base) 25 dBA (LFF Hot-plug Performance)
	<b>NOTE:</b> Configurations tested for LFF non hot-plug based models included one (1) 1TB LFF SATA Midline HDD and Windows 2012 Enterprise 64-bit.	
	<b>NOTE:</b> Configurations tested for LFF hot-plug base models included one (1) 1TB LFF SATA Midline HDD and Windows 2012 Enterprise 64-bit.	
	<b>NOTE:</b> Configurations tested for LFF hot-plug performance models included four (4) 2TB LFF SATA Midline HDD and Windows 2012 Enterprise 64-bit.	
	<b>NOTE:</b> The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.	
<b>Emissions Classification</b>	FCC Rating	Class B
	Normative Standards	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1
	<b>NOTE:</b> Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.	

<b>HPE Dynamic Smart Array B140i Controller</b>	<b>Number of PCI links</b>	Four
	<b>PCI link rate</b>	4Gb/s

## Technical Specifications

<b>Storage protocol support</b>	SATA
<b>SAS/SATA peak data transfer rate</b>	6Gb/s
<b>Number of SAS/SATA links</b>	10 links
<b>SAS/SATA connectivity</b>	2x4 connectors; 2x1 connectors
<b>Expander support</b>	No
<b>Drives supported (max)</b>	Up to 10 Internal Drives
<b>RAID support</b>	0, 1, 10, 5 SATA
<b>Software management</b>	HPE SSA, SMH, SIM
<b>Warranty</b>	Server warranty
<b>HPE Secure Encryption license</b>	Not Supported
<b>HPE SmartCache License</b>	Not Supported
<b>HPE Smart Storage Administrator</b>	Supported

---

<b>HPE Ethernet 1Gb 2-port 330i Adapter</b>	<b>Network Interface</b>	10Base-T/100Base-TX/1000Base-TX		
	<b>Compatibility</b>	IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX		
	<b>Data Transfer Method</b>	PCI Express, two lanes (x2)		
	<b>Controller</b>	BCM5717		
	<b>Network Transfer Rate</b>	10Base-T (Half-Duplex)	10 Mb/s per port, 40 Mb/s combined	
		10Base-T (Full-Duplex)	20 Mb/s per port, 80 Mb/s combined	
		100Base-TX (Half-Duplex)	100 Mb/s per port, 400 Mb/s combined	
		100Base-TX (Full-Duplex)	200 Mb/s per port, 800 Mb/s combined	
		1000Base-TX (Half-Duplex)	1000 Mb/s per port, 4000 Mb/s combined	
		1000Base-TX (Full-Duplex)	2000 Mb/s per port, 8000 Mb/s combined	
<b>Connector</b>	RJ-45			
<b>Cable Support</b>	10 Base-T	Categories 3, 4 or 5 UTP; up to 328 ft (100 m)		
	10/100/1000 Base-TX	Category 5 or higher UTP; up to 328 ft (100 m)		

## Technical Specifications

---

**Environment-  
friendly Products  
and Approach****End-of-life  
Management and  
Recycling**

Hewlett Packard Enterprise offers end-of-life product return, trade-in, and recycling programs, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

**[http://www8.hp.com/us/en/hpe/hp-information/livingprogress/environmentalprogress/product-recycling.html#.V-IPA\\_krKiM](http://www8.hp.com/us/en/hpe/hp-information/livingprogress/environmentalprogress/product-recycling.html#.V-IPA_krKiM)**

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

**[http://www8.hp.com/us/en/hpe/hp-information/livingprogress/environmentalprogress/product-recycling.html#.V-IPA\\_krKiM](http://www8.hp.com/us/en/hpe/hp-information/livingprogress/environmentalprogress/product-recycling.html#.V-IPA_krKiM)**

## Summary of Changes

Date	Version History	Action	Description of Change
13-Feb-2017	From Version 13 to 14	Added	Added new HDD and SSD offering to the HPE Drives section.
28-Nov-2016	From Version 12 to 13	Added	Added new Hard Drives offering.
		Changed	Maximum Internal Storage and Storage were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
28-Oct-2016	From Version 11 to 12	Removed	Obsolete Hard Drives were removed from the QuickSpecs.
26-Sep-2016	From Version 10 to 11	Changed	Core Options and Additional Options were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
7-Jun-2016	From Version 9 to 10	Added	Added new HPE Memory, new HPE Drives offering, new HPE NVIDIA Quadro M2000 Graphics Accelerator, and new HPE Disk Backup options.
		Changed	HPE Processors, Upgradeability, and HPE Memory sections were revised.
8-Apr-2016	From Version 8 to 9	Changed	HPE Processors section was revised.
31-Mar-2016	From Version 7 to 8	Added	Added Intel® E5-2600v4 processor support. New hard drives offering added to the HPE Drives section.
		Changed	Maximum Internal Storage, Embedded Management, Service and Support, Pre-configured Models, HPE Security, and Memory sections were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
17-Dec-2015	From Version 6 to 7	Added	Smart Buy models were added to the NA version.
1-Dec-2015	From Version 5 to 6	Changed	On System Management Chipset, Embedded Management, Server utilities, and HPE Unique Options were revised.
			Product images were updated.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
28-Sep-2015	From Version 4 to 5	Added	Added new 6Gb SATA Solid State Drives.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
17-Aug-2015	From Version 3 to 4	Changed	Rear view image was replaced.
			Additional Options was revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
1-Jun-2015	From Version 2 to 3	Added	New Hard Drives were added to Core Options.
			HPE Insight Software section was added to Additional Options.
			Optional Software was added to HPE Storage Controllers.
		Changed	Standard Features was revised.
			HPE Storage Controllers and HPE Disk Backup were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
24-Apr-2015	From Version 1 to 2	Added	Smart Buy models added to the NA version only.

## Summary of Changes



**Sign up for updates**

---

© Copyright 2017 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

c04545452 - 15204 - Worldwide - V14 - 13-February-2017

